


JUPITER SL871-S

GPS Module

GPS Embedded

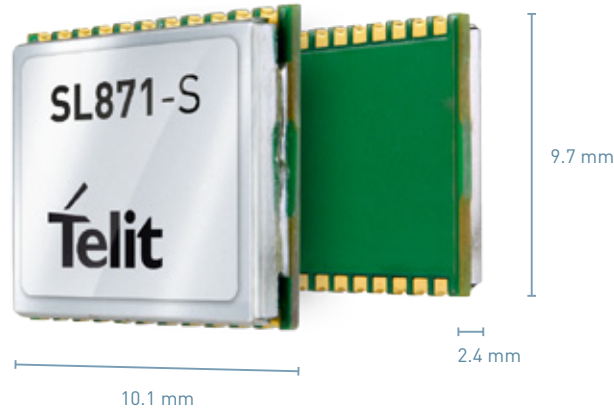

Product Description

The Jupiter SL871-S is a representative of the xL871 GNSS module family. The SL871-S is designed to comply with both GPS and QZSS constellations and is pin-to-pin compatible with its GNSS companion, the SL871.

The SL871-S is encased in a 9.7 x 10.1 mm LCC package and includes an ARM7 baseband processor, embedded ROM and integrated LNA. It delivers positioning data via standard UART and an ultra-sensitive RF front-end provides for superior navigation performance in challenging environments with poor sky visibility.

The Jupiter SL871-S supports ephemeris file injection (A-GPS) as well as Satellite Based Augmentation System (SBAS) to increase position accuracy. It also features very low power consumption in all operating conditions, optimized for long battery life applications. The SL871-S is designed to ensure hardware and software compatibility with the SL871 which allows development of a single application, circuit and PCB design efforts for use with either product.

Key Benefits

- Pin-to-pin compatible with the SL871
- Compliant with GPS and QZSS standards
- Extreme low power consumption
- Current-optimized tracking
- Ultra-sensitive -165 dBm (tracking) RF front-end
- A-GPS ephemeris file injection
- Satellite Based Augmentation System (SBAS)

Family Concept

Our positioning product portfolio is the result of over twenty years of experience in GNSS applications. Telit has developed a range of products compatible with the well-known GPS constellation as well as its Russian counterpart GLONASS. Moreover, our portfolio is fully aligned with the upcoming service launch of Europe's Galileo constellation. Important features such as Dead Reckoning, Precision Timing, as well as speed and reliability assured by multi-constellation coverage, provide additional benefits for your application.

Your application development effort can also benefit significantly from the seamless integration with Telit cellular modules. This bundling of cellular and positioning modules significantly reduces development complexity without adding costs. Multi-constellation positioning products applied together with our eCall/ERA-GLONASS compliant cellular modules bring you ready-to-use emergency automotive tracking solutions for the European and Russian markets.

Typical applications include fleet management systems, European GPS-assisted road tolling systems, cellular base stations, in-car navigation systems, automotive telematics systems, and GPS-based personal sports training monitors.

Combine your GNSS module with

Cellular modules



Short Range modules



www.telit.com

JUPITER SL871-S

GPS Module

GNSS family comparative table

Model	Constellations				Interfaces			Features			
	GPS/QZSS	GLONASS	GALILEO	BDS	UART	I2C	LNA	DC block	Ant ON	Ant sense	Flash
SL871	●	●	●	●	●	○			●	●	●
SL871L	●	●	●	●	●	○	●	●	●	●	●
SL871-S	●				●				●		
SL871L-S	●				●		●	●	●		

Product Features

- 18-pad LCC package, requiring only 2 Layer PCB
- Frequency Bands: GPS L1, QZSS L1 Bands
- Standards: NMEA
- Jamming Rejection
- Data logging
- A-GPS: ephemeris file injection
- EGNOS, WAAS, GAGAN and MSAS capability embedded with correction of positional errors due to ionospheric and orbital disturbances

Environmental

- Dimensions: 10.1 x 9.7 x 2.4 mm
- Weight: 1 g
- Temperature range:
 - Operating temperature: -40 to +85°C
 - Storage temperature: -40 to +85°C

Interfaces

- UART
- PPS for precise timing

Approvals

- RoHS compliant
- R&TTE

Electrical & Sensitivity

- Current consumption
 - Low power tracking: 9 mW
 - Full power tracking: 44 mW
 - Full power acquisition: 51 mW
- Sensitivity
 - Acquisition: -144 dBm
 - Navigation: -159 dBm
 - Tracking: -163 dBm
- Power supply
 - Range from 2.8 up to 4.3 V
- Positional accuracy (CEP50): Autonomous Positional Error 2.5 m
- Accuracy
 - Speed: < 0.01 m/s
 - Heading: < 0.01 deg
- Time to first fix (90% @ -130 dBm)
 - Hot start: 1 s
 - Cold start: < 35 s

[09.2015]

Telit reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by Telit at any time. For most recent documents, please visit www.telit.com

Copyright © 2015, Telit
* Copyright © 1990-2015, Python Software Foundation



Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all IoT topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing IoT community and exchange experiences.

Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Phone +39 040 4192 200
Fax +39 040 4192 383
E-Mail EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Phone +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Paes Leme, 524, Conj. 126
05424-101, Pinheiros
São Paulo-SP-Brazil
Phone +55 11 3031 5051
Fax +55 11 3031 5051
E-Mail LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
8th Fl., Shinyoung Securities Bld.
6, Gukjegeumyung-ro8-gil, Yeongdeungpo-gu
Seoul, 150-884, Korea
Phone +82 2 368 4600
Fax +82 2 368 4606
E-Mail APAC@telit.com

www.telit.com

- www.telit.com/techforum
- www.telit.com/facebook
- www.twitter.com/Telit_Corp